

DC35VP25CF



Protector

Quick-acting


RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

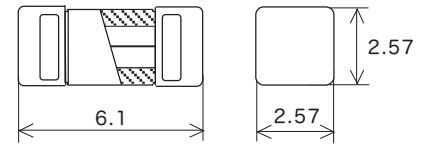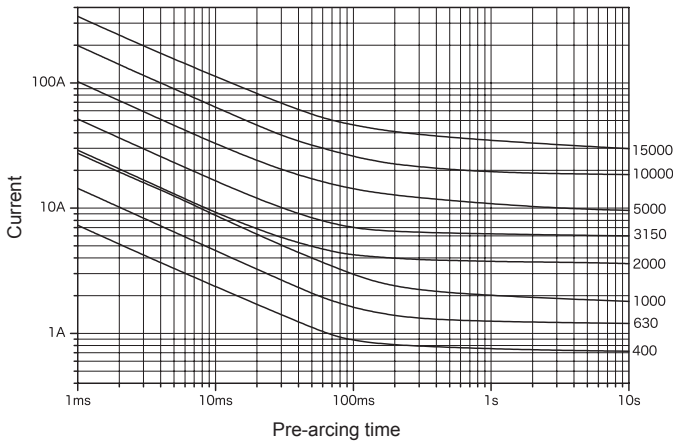

Land pattern for reflow soldering (reference dimensions)

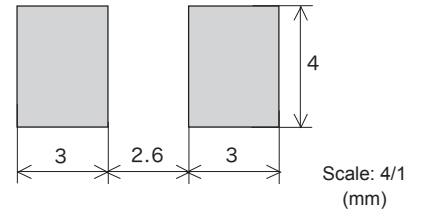

Maximum working voltage	Certification	Rated current (I_N) *1	Maximum breaking current	Temp. rise	Current carrying capacity	Overload operation
DC 35 V	-	63 mA–10 A	50 A	Resistive circuit	1.0 I_N until temperature stabilization occurs	Within 60 s at 2.0 I_N
		Over 10 A–15 A				
		Over 15 A–18 A				

*1: Customer-requested rated current values can be supplied from within the given range.

Note: The rated current (in amperes) multiplied by 1,000 is indicated on the product and its packaging (e.g., "630" for the 0.63 A version). The product name is the type name followed by this value.

DC35VP25CT



Protector

Inrush-withstand


RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

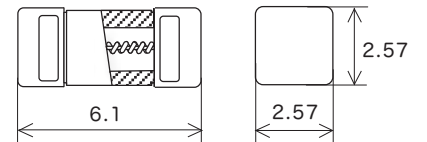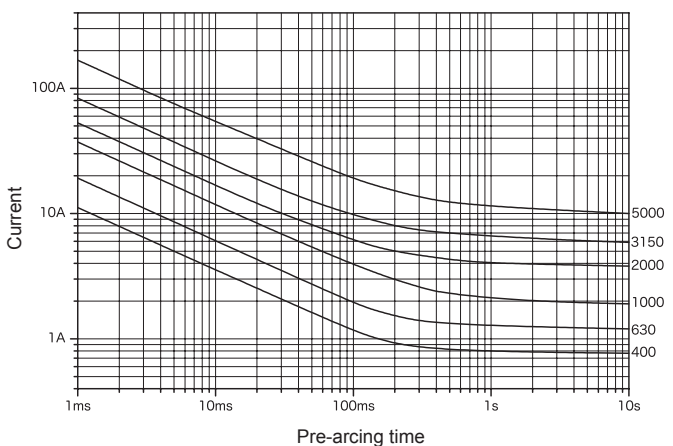

Land pattern for reflow soldering (reference dimensions)

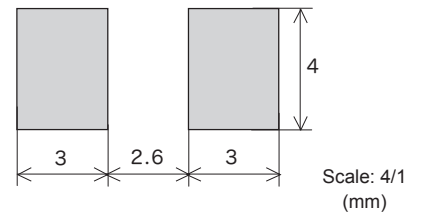

Maximum working voltage	Certification	Rated current (I_N) *1	Maximum breaking current	Temp. rise	Current carrying capacity	Overload operation
DC 35 V	-	100 mA–5 A	50 A	Resistive circuit	1.0 I_N until temperature stabilization occurs	Within 60 s at 2.0 I_N

*1: Customer-requested rated current values can be supplied from within the given range.

Note: The rated current (in amperes) multiplied by 1,000 is indicated on the product and its packaging (e.g., "630" for the 0.63 A version). The product name is the type name followed by this value.