
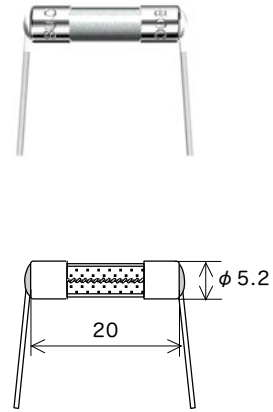


Representative pre-arcing time-current characteristics

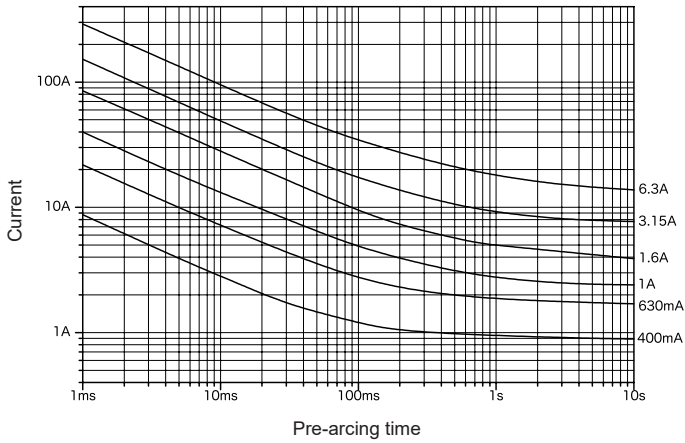

Lead wire diameter  $\phi$  0.8

Scale: 1/1 (mm)

Rated voltage	Certification	Rated current ( $I_N$ ) *1	Rated breaking current	Temp. rise	Current carrying capacity	Overload operation
AC 400 V		100 mA–6.3 A	500 A	Resistive circuit	75 K or less at 1.0 $I_N$	1.0 $I_N$ until temperature stabilization occurs
DC 400 V			200 A			
	- *3	100 mA–2.5 A	1500 A			

\*1: Customer-requested rated current values can be supplied from within the given range.

\*2: This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.

\*3: This specification is based on SOC internal testing.